

## X105

8-channel D/I or D/O  
(Can be programmed to Digital Input or Output)

### Features

- Used with I-7188XC
- 8-channel Non-Isolation Digital Input or 8-channel Non-Isolation Digital Output
- Can be programmed to Digital Input or Output



### Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one  $\mu$ PAC can plug only one X-board.

X105 is a 8-channel Non-Isolation Digital Input or 8-channel Non-Isolation Digital Output X-board for I-7188XC.

### Specifications

Digital Input	
Channels	8 (each channel can be programmed to DI/DO)
Digital Logic Level	High: 3.5 V ~ 30 V Low: 0 V ~ 1 V
Isolation	None
Digital Output	
Channels	8 (each channel can be programmed to DI/DO)
Type	TTL level
Isolation	None
Power	
Consumption	0.3 W
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +80 °C
Humidity	5 ~ 90 %, Non-condensing

### Pin Assignments

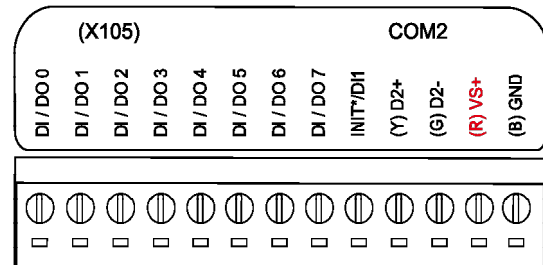

### Ordering Information

<b>X105</b>	8-channel D/I or D/O (Can be programmed to Digital Input or Output)
-------------	---