



cBP-6609A

8-slot 64-bit 6U CompactPCI® H.110 & PICMG® 2.16 Backplane



cBP-6609A Front View



cBP-6609A Rear View

Specifications


Model Name	cBP-6609A
PICMG®	2.0 R3.0, 2.1 R2.0, 2.5 R1.0, 2.16, 2.9 R1.0
Dimensions	225 x 262.05 (mm, W x H)
Segments	One
cPCI Bus	Up to 64-bit/66 MHz
System Slot	Right-Hand side
System Slot Rear I/O	P3, P4, & P5
Peripheral Slot	Five
Peripheral Slot Rear I/O	P4 & P5
H.110 Bus	Comply with PICMG 2.5 for all peripheral slots (P4)
V (I/O)	3.3 V or 5 V selectable, factor default is 5 V
Power Connectors	Two ATX, DC screw terminals
Chassis or Sub-system	cPSB-880

Ordering Information

Model Number	Description/Configuration
cBP-6609A	8-slot 64-bit 6U cPCI H.110 & 2.16 Bus Backplane

cBP-6614A

14-slot PICMG® 2.16 6U CompactPCI® Blade Server Backplane

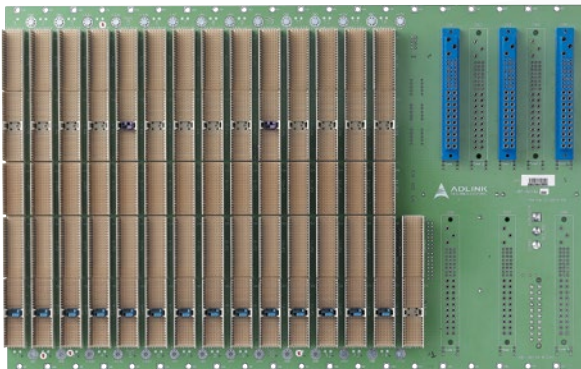

Specifications

Model Name	cBP-6614A
PICMG®	2.0 R3.0, 2.1 R2.0, 2.9 R1.0, 2.11 R1.0, 2.16 R1.0
Dimensions	420.6 x 262.05 (mm, W x H)
2.16 Node Slot	12
2.16 Fabric Slot	Two
cPCI Bus	None
System Slot	All node slots act as stand-alone system slots
Slot Rear I/O	P3, P4 and P5 rear I/O with AB-type shroud
Peripheral Slot	None
CMM Slot	One
Power Socket	3 for 6U 8HP redundant power module
H.110 Bus	None
V (I/O)	3.3 V or 5 V selectable, factory default is 5 V
Power Connectors	AC/DC input, One ATX connector, DC screw terminals
Other Connectors	INH#, FAL#, DEG#, Voltage LEDs, Reset, PICMG® 2.9 IPMB
Chassis or Sub-systems	cPCIS-3300BLS series

Ordering Information

Model Number	Description/Configuration
cBP-6614A	14-slot PICMG® 2.16 6U cPCI Blade Server Backplane