


DB-8425




Two Female DB9 to Screw Terminal Board for PISO-DA2U

Features

- Connector interface for PISO-DA2U
- Screw terminals for easy field wiring
- 9-pin D-sub connector pin to pin screw terminal for PISO-DA2U
- Current rating:1 A Max.
- Dielectric withstanding voltage: 250VAC for 1 minute
- DC rating: 24 V Max.




🖿 Pin Assignment

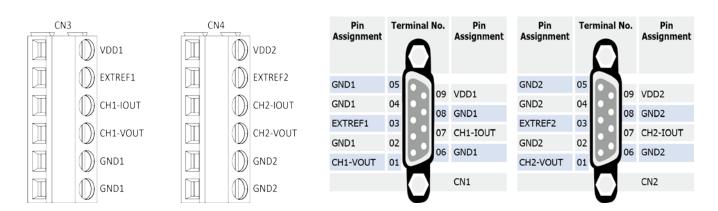

I/O Specifications

Mechanical	
Dimensions	99mm x 82mm (W x L)
Environment	
Operating Temp.	$0 \sim +60 $ °C
Storage Temp.	-30 ~ 80 ℃
Humidity	10 ~ 90% RH, non-condensing

Dimensions (Units: mm)

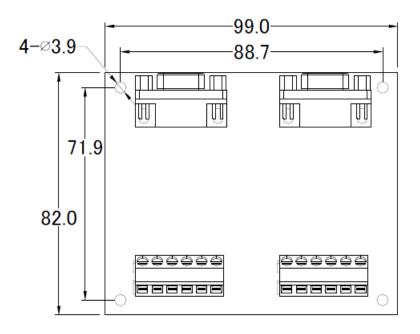

Ordering Information

DB-8425/DIN	Two Female DB9 to Screw Terminal Board for PISO-DA2U
	Include: CA-0920 (DB9(Male) to DB9(Male) Cable [RS-232; Pin1-Pin9], 2M)