



## I-8211W-G

Time Sync Module, using GPS, GLONASS  
(Asia Only)

### Features

- Time error under 1 millisecond
- Support GPS, GLONASS
- Capable of SBAS (WAAS, EGNOS, MSAS)
- Plug and Play in LinPAC (LX-8x31, LP-8x21) series



### Introduction

I-8211W-G is a GPS, GLONASS receiver module designed to use GPS, GLONASS satellite time for automatic and precise time synchronization. The I-8211W-G can be plugged into any slot of the LinPAC, the LinPAC will automatically launch the application and acquire GPS, GLONASS time to reduce RTC drift to 1ms. The I-8211W is preset to receive GPS signals, you can modify the LinPAC settings to receive GLONASS signals.

PS: LinPAC with NTPD package: LP-8x21, LX-8x31


```
root@icpdas:~# ntpq -p
remote          refid          st t when poll reach  delay  offset  jitter
=====
oGPS_NMEA(0)    .GPS.         0 1  15  64  377  0.000 -0.068  0.148
```

### System Specifications


LED Indicators	
Status	1 x Power 1 x GPS/GNSS
GPS/GNSS	
Acquisition Time	Cold Start (Open Sky)=42 s (typical)
Frequency	L1 1575.42 MHz, C/A code
Max. Altitude	<18,000 m
Max. Velocity	<515 m/s
Position Accuracy	Capable of SBAS (WAAS, EGNOS, MSAS)
Protocol	NMEA 0183 version 3.01
Sensitivity	Tracking: Up to -158 dBm Cold start: Up to -142 dBm
Support Channels	32
Power	
Consumption	0.75 W (Max.)
Mechanical	
Dimensions (mm)	32 x 87 x 114 (W x L x D)
Environment	
Operating Temperature	-25 to +75°C
Storage Temperature	-40 to +85°C
Humidity	10 to 90% RH, Non-condensing

## Applications


- Satellite time correction
- Precise timekeeping and time measurement

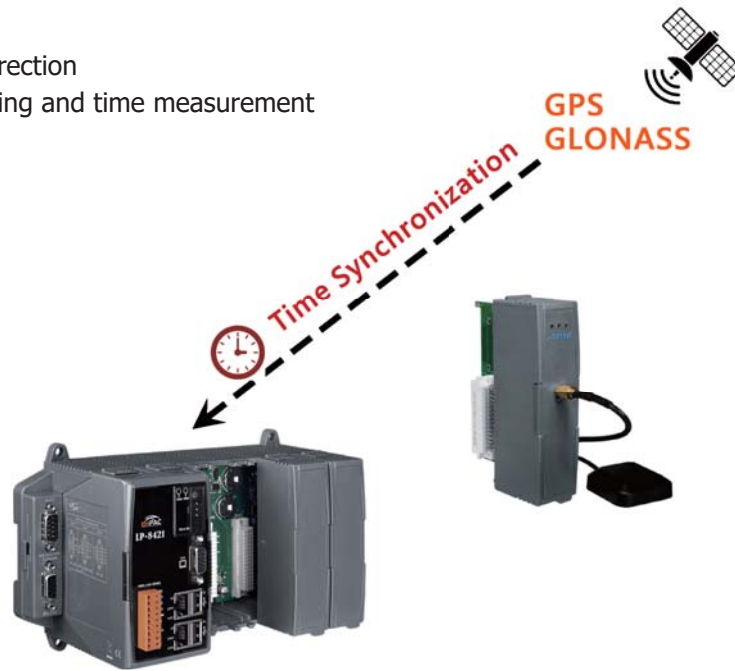

## Pin Assignments

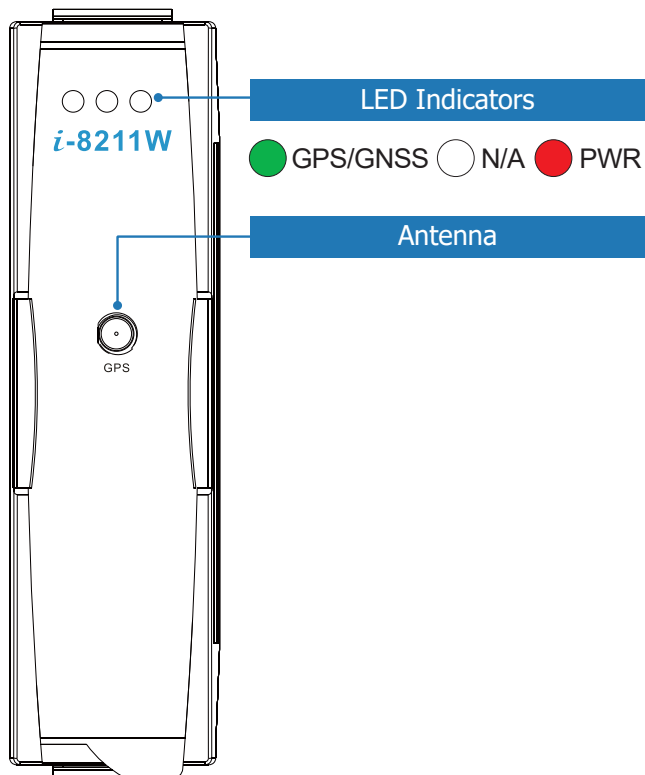

## Dimensions (Units: mm)

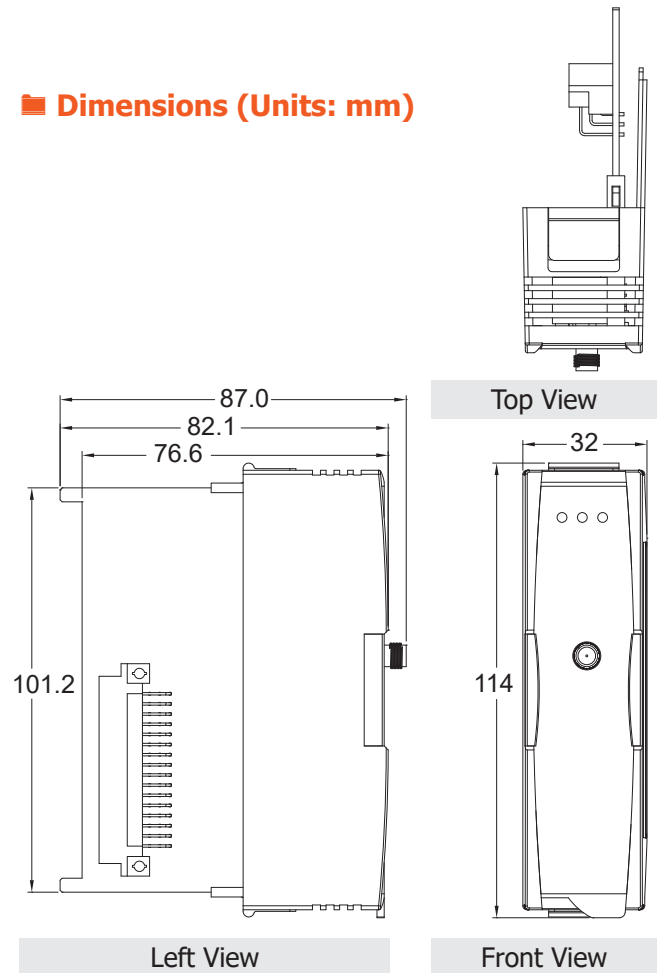

## Ordering Information

<b>I-8211W-G CR</b>	Time Sync Module, using GPS, GLONASS (RoHS) (Asia Only) Includes a 5 m antenna (ANT-115-03-2)
---------------------	--------------------------------------------------------------------------------------------------