

X102

2-channel relay output

Features

- Used with I-7188XC
- 2-channel Relay Output



Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one μ PAC can plug only one X-board.

X102 is a 2-channel Relay Output X-board for I-7188XC.

Specifications

Relay Output	
Channels	2 (Form "C")
Contact Rating	220 VDC, 250 VAC@2 A
Operate Time	6 ms
Release Time	6 ms
Electrical Endurance	Typical 500,000 operation at 30 VDC/1A Typical 100,000 operation at 125 VAC/0.5A
Surge Strength	1,500 V
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +80 °C
Humidity	5 ~ 90 %, Non-condensing

Pin Assignments

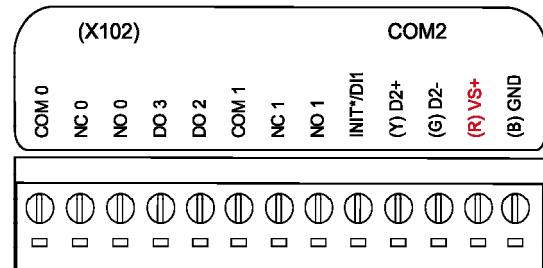

Ordering Information

X102	2-channel relay output
-------------	------------------------