

X109
7-channel PhotoMos relay

Features

- 7-channel PhotoMos relay output



Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one μ PAC can plug only one X-board.

X109 is a 7-channel PhotoMos relay output X-board for I-7188XB, I-7188XG, I-7188EX, I-7188EG and uPAC-7186EX Series.

Specifications

Relay Output	
Channels	7 (Form A)
Contact Rating	350 V@100 mA
Leakage Current	1 μ A
Operate Time	0.23 ms
Release Time	0.04 ms
Isolation	1500 VAC
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +80 °C
Humidity	5 ~ 90 %, Non-condensing

Pin Assignments

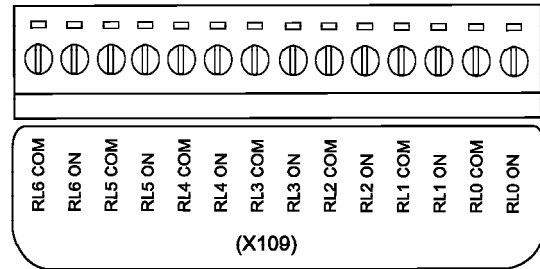

Ordering Information

X109 CR	7-channel PhotoMos relay (RoHS)
----------------	---------------------------------