

X511
3-Port RS-485

Features

- 3-Port Non-Isolation RS-485



Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one μ PAC can plug only one X-board.

X511 is a 3-Port Non-Isolation RS-485 X-board for I-7188XB, I-7188XG, I-7188EX, I-7188EG and uPAC-7186EX Series.

Specifications

| COM Ports | |
|-----------------------|---|
| Ports | 3 x RS-485 (Data+, Data-) |
| Baud Rate | 115200 bps Max. 1200 ~ 115200 bps 10 k, 20 k, 50 k, 125 k, 250 kbps, 500 k, 800 k, 1M 125 k, 250 k, 500 k |
| FIFO Size | 16 bytes |
| Mechanical | |
| Dimensions (mm) | 38 mm x 64 mm |
| Environmental | |
| Operating Temperature | -25 ~ +75 °C |
| Storage Temperature | -40 ~ +80 °C |
| Humidity | 5 ~ 90 %, Non-condensing |

Pin Assignments

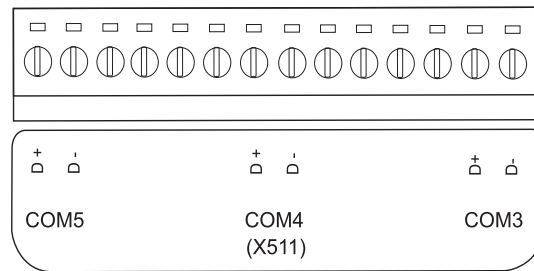

Ordering Information

| | |
|----------------|----------------------|
| X511 CR | 3-Port RS-485 (RoHS) |
|----------------|----------------------|