



## DN-37/2



Female DB37 to Screw Terminal Board  
(Pitch= 5.08 mm) with DIN-rail Mounting

### Features

- Two 37-pin D-sub connector (One for expansion)
- Pin to Pin screw terminal for I/O connected
- Current rating:1 A Max.
- Dielectric withstanding voltage: 250VAC for 1 minute
- DC rating: 50 V Max.




### Introduction

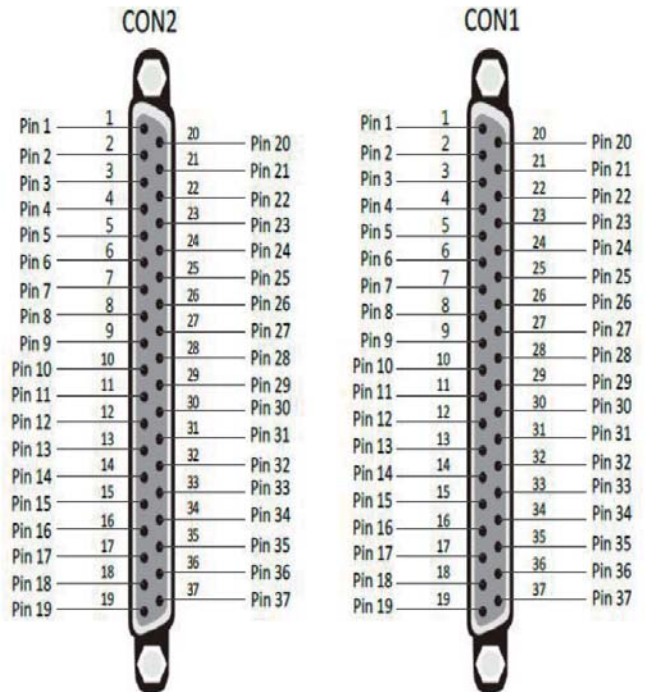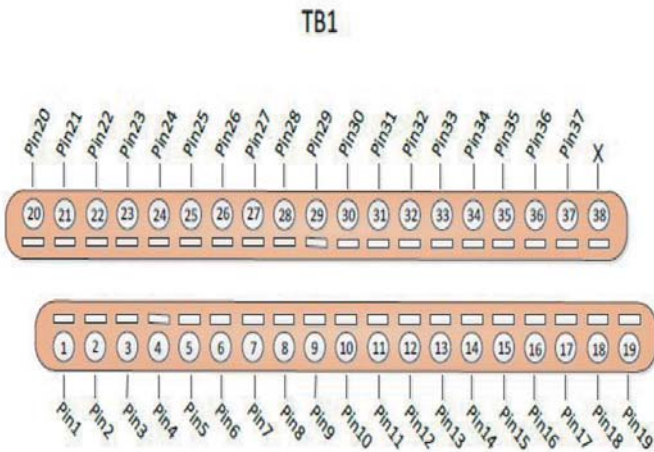

### I/O Specifications

Mechanical	
Dimensions (mm)	144 mm x 72 mm
Installation	DIN-Rail mounting
Environment	
Operating Temperature	0 ~ 60°C
Storage Temperature	-20 ~ 70°C
Humidity	5% ~ 90% RH, non-condensing

### ■ Dimensions (Units: mm)

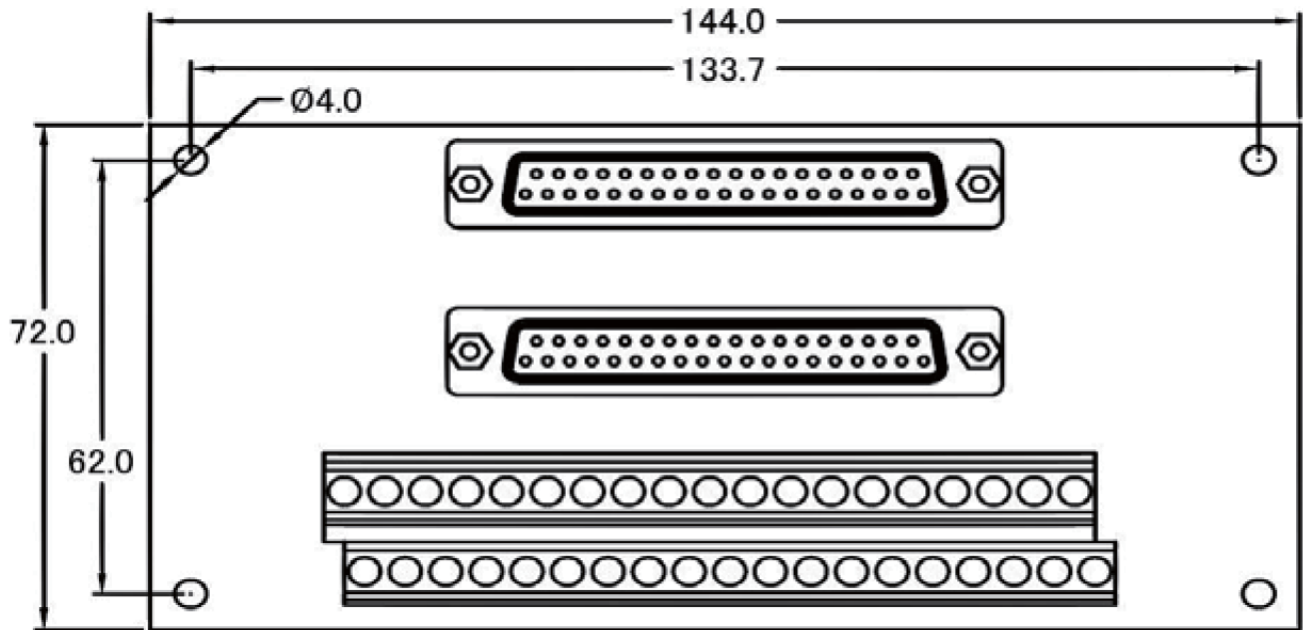

### ■ Ordering Information

<b>DN-37/2 CR</b>	Female DB37 to Screw Terminal Board (Pitch= 5.08 mm) with DIN-rail Mounting (RoHS) Include: CA-3720 (DB37 Male to Male, 45°, 2M)
-------------------	---