

# MLB-3102 Medical Box PC

Medical box PC with the 12<sup>th</sup>/13<sup>th</sup> Gen Intel® Core™ i3/i5/i7/i9 in LGA1700 Socket, supporting MXM GPU module and Thunderbolt™ 4

Compliant with IEC 60601-1 / IEC 60601-1-2



## Features

- ADLINK MXM graphics module support (type A/B, up to 120W TDP based on power supply)
- 12<sup>th</sup>/13<sup>th</sup> Gen Intel® Core™ i3/i5/i7/i9, Celeron® processor
- Dual SODIMM for up to 64GB DDR5 non-ECC memory (depending on CPU)
- 1x HDMI 2.0, 5x DisplayPort (1 from CPU, 4 from MXM)
- 1x M.2 E-key supporting 1630 or 2230 for Wi-Fi/Bluetooth module, 1x M.2 M-key supporting 2242 or 2280 for SATA storage module, 1x M.2 M-key supporting 2242 or 2280 for NVMe & frame grabber
- Reliable Molex 24V DC-in connector
- 2x 2.5GbE Intel® I225-LM Ethernet Controller




## Software Support

- Win 10/Win 11 IoT Enterprise
- Ubuntu 20.04

## Optional Accessories

- Black plate of GPU card: 32-50032-1000-A0
- MXM cooler for P1000/P2000: 32-20797-0200-A0
- MXM cooler for A1000/A2000: 32-20932-0000-A0
- MXM cooler for A4500: 32-20965-0000-A0
- MXM cooler for RTX3000: 32-20823-1100-A0
- 24V/450W Medical grade adapter: TBD
- Wall Mount Bracket 34-34546-0100-A02pcs
- Wi-Fi Kit Intel® AC9260 Non-VPRO 91-95266-0020

## Dimensions

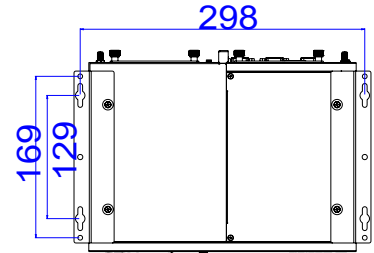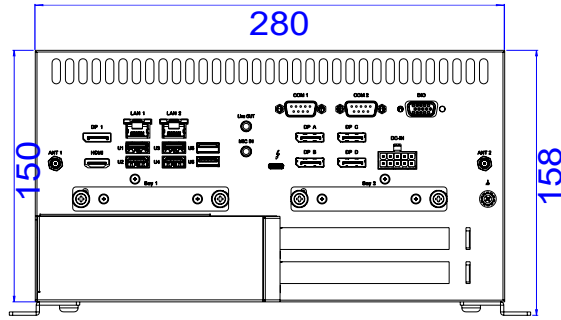

Unit: mm

## Specifications

Model		MLB-3102		
MXM Support	EGX-MXM-A1000	EGX-MXM-A2000	EGX-MXM-A4500	
Processor	Intel® Core™ i9-12900E, 5.0GHz, 14M Cache, 65W TDP, LGA1700, DDR5 4800MHz support Intel® Core™ i7-12700E, 3.6GHz, 12M Cache, 65W TDP, LGA1700, DDR5 4800MHz support Intel® Core™ i5-12500E, 3.0GHz, 7.5M Cache, 65W TDP, LGA1700, DDR5 4800MHz support Intel® Core™ i3-12100E, 3.2GHz, 5M Cache, 60W TDP, LGA1700, DDR5 4800MHz support			
Chipset	Intel® Q670E Chipset			
Memory	Non-ECC DDR5 4800MHz, 2x SO-DIMM, up to 64GB			
<b>I/O Interfaces</b>				
Display	1x HDMI 2.0, 5x DisplayPort (1 from CPU, 4 from MXM)			
Ethernet	2x 2.5GbE (Intel® I225-LM)			
Serial Ports	1x RS-232/422/485, 1x RS-232			
USB	[Front] 1x USB 3.2 gen 2 Type A [Rear] 2x USB 3.2 Gen 2 Type A, 4x USB 3.2 Gen 1 Type A, 1x USB 3.2 Gen 1 Type C			
M.2	1x M.2 E-key supporting 1630 or 2230 for Wi-Fi/BT module, 1x M.2 M-key supporting 2242 or 2280 for PCIe/SATA for storage, 1x M.2 M-key supporting 2242 or 2280 for PCIe Gen 4 x4 for NVMe & frame grabber			
Digital IO	1x DI/DO with 4 in, 4 out			
Audio	Default: Mic in & line out Option: L/R speaker-out (6W + 6W), Mic-in			
TPM 2.0	Default: w/o TPM, optional TPM			
Expansion slot	2x PCIe Gen 3 x4 expansion slot for full height half length add on card, Total max supports 25W power budget and additional Molex 4 pin power cable (12V/4.17A) support			
<b>Storage</b>				
SATA/PCIe	2x 2.5" SATA 6Gb/s external drive bays 1x M.2 2242/2280 M key support SATA/PCIe gen 3 x 3 to support storage 1x M.2 2242/2280 M key support PCIe gen 4 x 4 to support storage			
<b>Mechanical</b>				
Dimensions	280 x 198 x 150mm (W x D x H, without foot pads)			
Weight	8.4 kg			
Mounting	Optional wall-mount bracket			
<b>Power Supply</b>				
DC Input	DC 24 input (Molex DC-in jack)			
AC Input	450W (24V/18.75A) AC/DC Medical grade adapter			
<b>Environmental</b>				
Operating Temperature	0°C to 40°C			
Storage Temperature	-20°C to 70°C			
Humidity	5% to 95%, non-condensing			
Vibration	Operating vibration: 2Grms, 5-500Hz, 3 axes, Package (NON-OP) vibration: 3.44Grms, 10-1000Hz, 3 axes (W/MXM, W/SSD)			
EMC	EN55032/35, CE, FCC			
Safety	UL/cUL and CB (62368-1:2014)			
Medical Grade	Compliant with IEC60601-1:2005+A1:2012+A2:2020(3.2edition)/IEC 60601-1-2:2014+A1:2020(4.1edition)			